

MODEL:


SRTHERMDUCT

Thermal Duct Kit for SmartRack® Enclosures

- A** Chimney
(Adjusts between 20.5 and 34.5 inches when assembled.)
- B** Cable Access Panel
- C** Magnetic Vinyl Sheets (16)
- D** Enclosure Bottom Panel

Not Shown: Flat and Tubular Door Seals, 252 x 68 mm and 252 x 137 mm Magnetic Vinyl Sheets

Also Includes: Owner's Manual and Mounting Hardware
(4 M8 screws, 4 M4 screws, 16 M4 nuts).

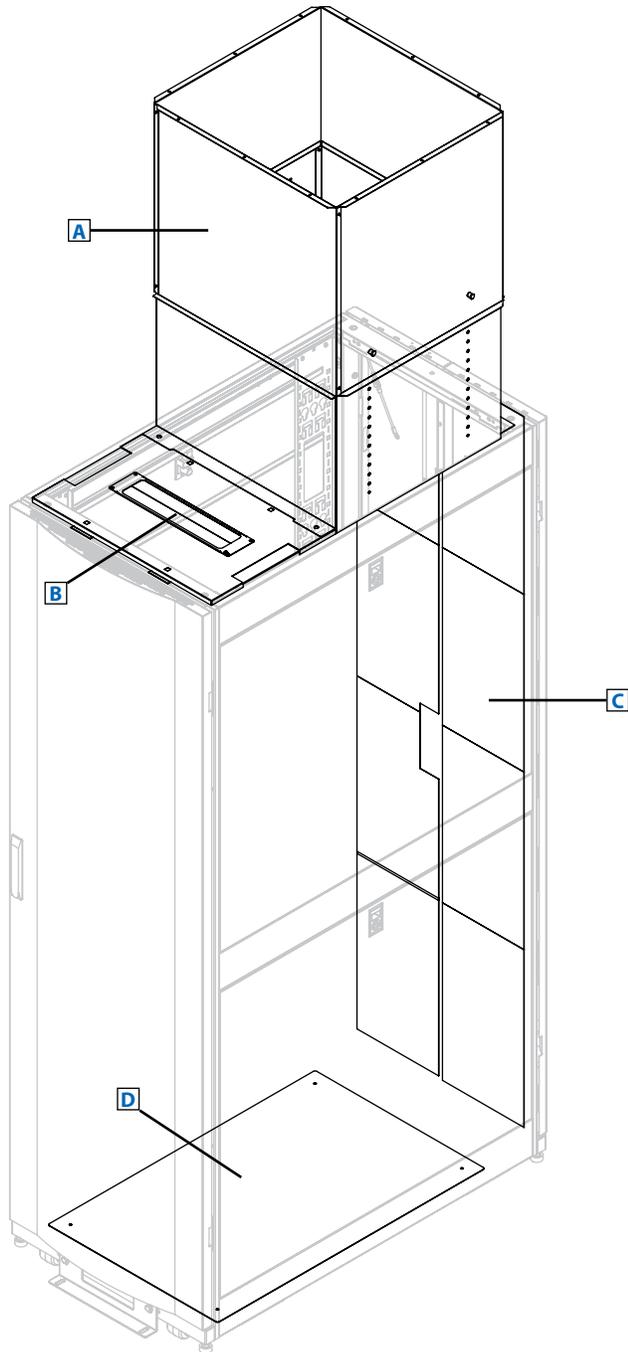

- Improves cooling efficiency in Tripp Lite standard rack enclosures
- Adjustable roof-mounted thermal duct moves air upward and out of the rack enclosure
- Compatible with standard 42-48U SmartRack Enclosures

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS


Specifications

Model	SRTHERMDUCT
Shipping Dimensions (H x W x D)	11.8 x 25.6 x 35.4 in. / 299.7 x 650.2 x 899.2 mm
Shipping Weight	70 lb. / 31.8 kg
Standards	Meets RoHS standards

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.




1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

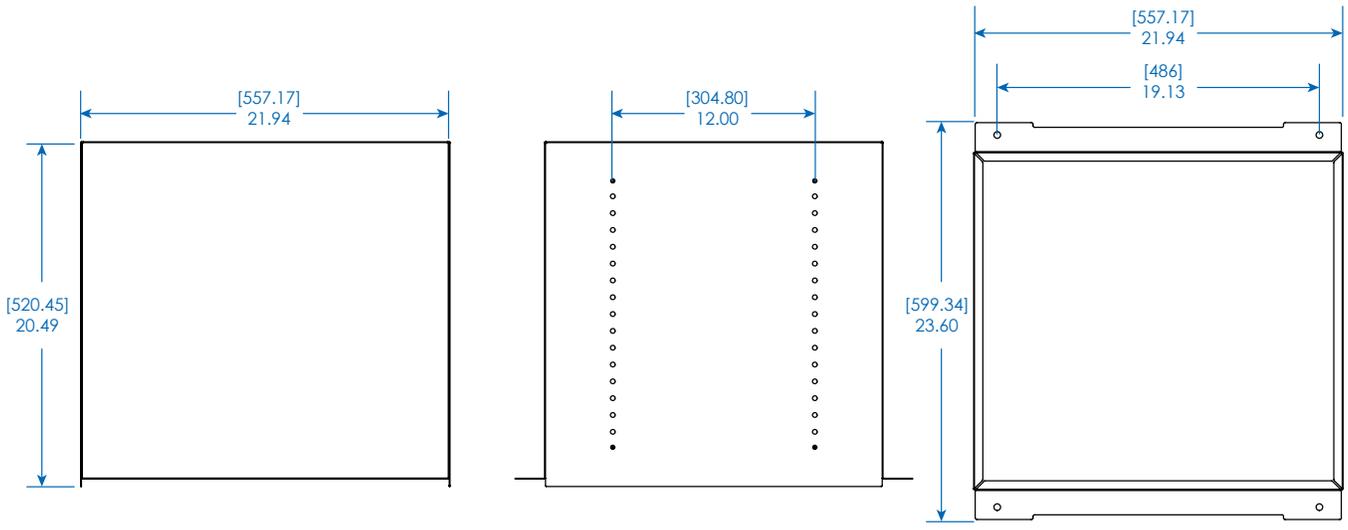


CHIMNEY FRONT

CHIMNEY SIDE


CHIMNEY TOP

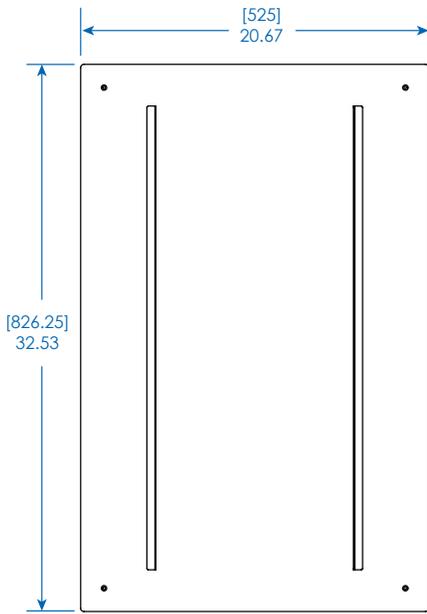


ENCLOSURE BOTTOM PANEL

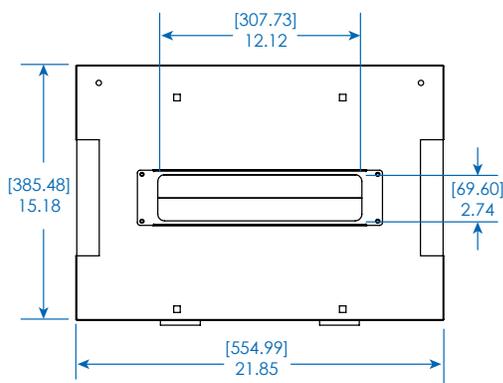


CABLE ACCESS PANEL

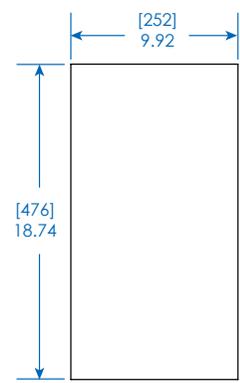


MAGNETIC VINYL SHEET




MAGNETIC VINYL SHEET



MAGNETIC VINYL SHEET

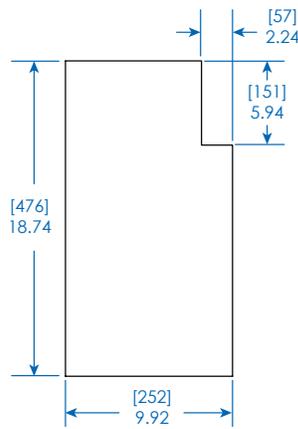

MAGNETIC VINYL SHEET

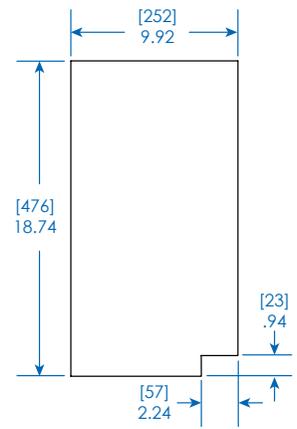

MAGNETIC VINYL SHEET

MODEL:
SR THERMDUCT
TRIPP-LITE

1111 W. 35th Street
 Chicago, IL 60609 USA
 773.869.1234
 www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.